


# GALVANIZED SLANT BACK ROOF VENT



**HEAVY-DUTY  
GALVANIZED  
CONSTRUCTION**

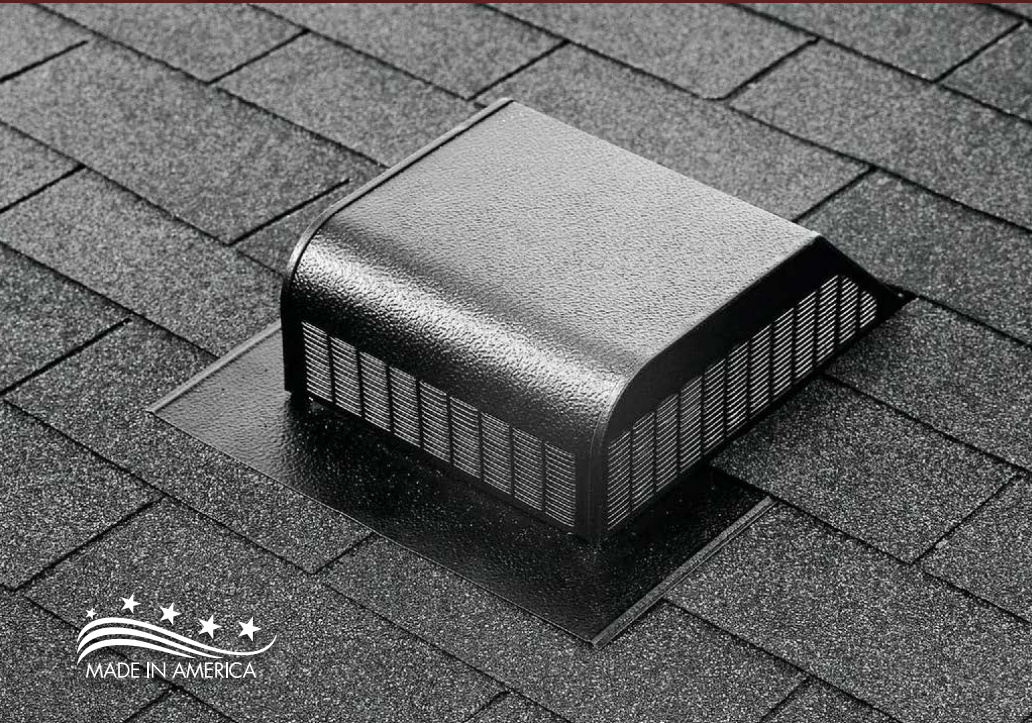

**8" ROUND OPENING**



**NFA:  
50 SQ. IN./PC.**



**OPTIONAL  
FILTER AVAILABLE**

## PRODUCT FEATURES

APPROVALS:  | **tdi**



**MILL**



**BLACK**



**BROWN**



**WEATHERWOOD**

COLOR	MODEL	PCS/CTN	CTNS/PALLET
Mill	SV-MGSB	6	12
Black	SV-BLGSB	6	12
Brown	SV-BRGSB	6	12
Weatherwood	SV-WWGSB	6	12

NFA OF VENT	1000 SQ. FT.	1500 SQ. FT.	2000 SQ. FT.	2500 SQ. FT.
50 Sq. in.	5	8	10	12

- Use this chart to determine the number of vents your attic requires (minimum code requirement).
- It is suggested to install more louvers than the minimum code requirements.
- 3/12 to 12/12 roof pitch.
- An attic requires an equal amount of intake (soffit) and exhaust (roof) ventilation.